


## TB100 - BLOW LABELLING


TB100 is ideal where non-contact labelling is preferred (like on bread, groceries etc) - and where the distance to product is short. The TB100 is therefore seen in many bakeries and in other kind of food industries.

The TB100 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come - even in the most harsh industrial environments!

The applicator can be opened for service etc.

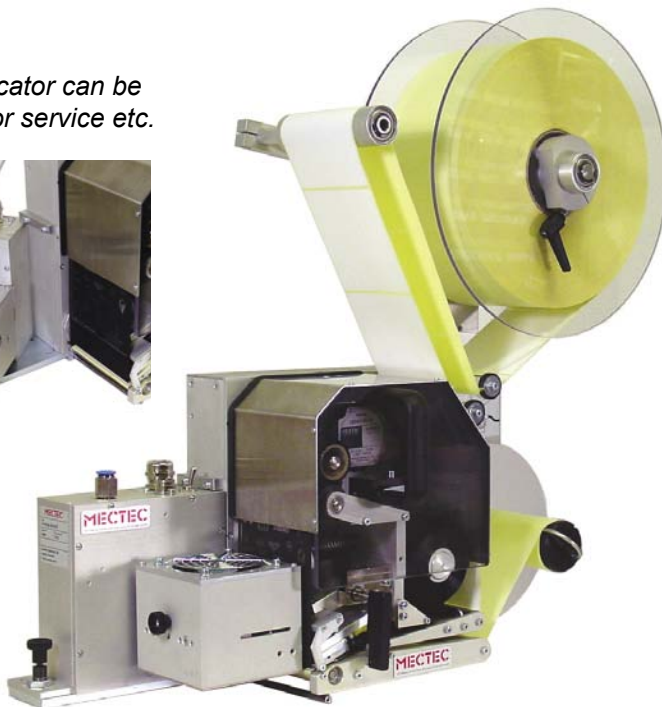

Printer and applicator in right hand version

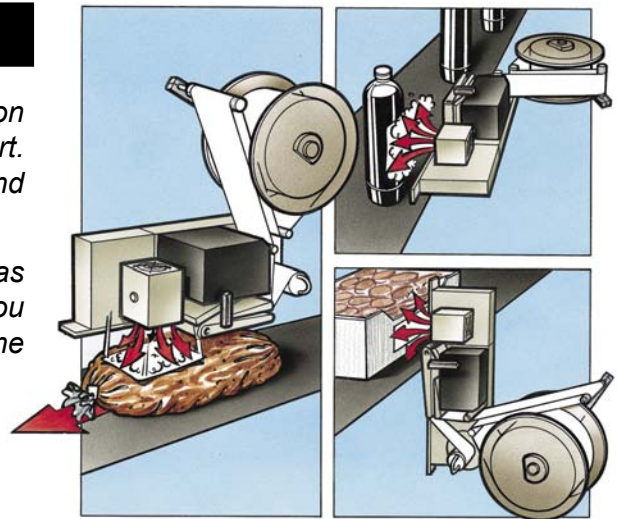

Labelling on different kind of products. Applies on on both moving and stationary products!



Handheld terminal TG300 (optional)



Printer Control Unit PCU III

### TECHNICAL DATA

<b>Type of applicator:</b>	Blow
<b>Blow box size:</b>	100 x 100 mm
<b>Print speed:</b>	Up to 275 mm/sec
<b>Resolution:</b>	8 or 12 dots/mm 200/300 DPI
<b>Interface:</b>	2 x RS232, 1 x RS485, 1 x Parallel
<b>Overall dimensions:</b>	635 x 614 x 258 mm (l x h x w) - P & A 406 x 265 x 128 mm (l x h x w) - PCU III
<b>Controller functions:</b>	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

### FAST FACTS

<b>Printer:</b>	4" Thermal Transfer
<b>Application:</b>	Top, bottom or side labelling Stationary or moving object
<b>Label size:</b>	40 x 30 - 100 x 100 mm
<b>Distance:</b>	0 - 50 mm

Available in both right- and left hand version!

### ACCESSORIES

- TG300 - Handheld terminal
- Warning Low Level Labels and Ribbon
- Flashlight/Beacon
- Check scanner
- Fixed or adjustable stands