



TP602 - PALLET LABELLING (2 stops)

The TP602 is a system for automatic 2-side pallet labelling - requiring two stops of the pallet - when labelled on two adjacent sides.

The TP602 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come - even in the most harsh industrial environments!

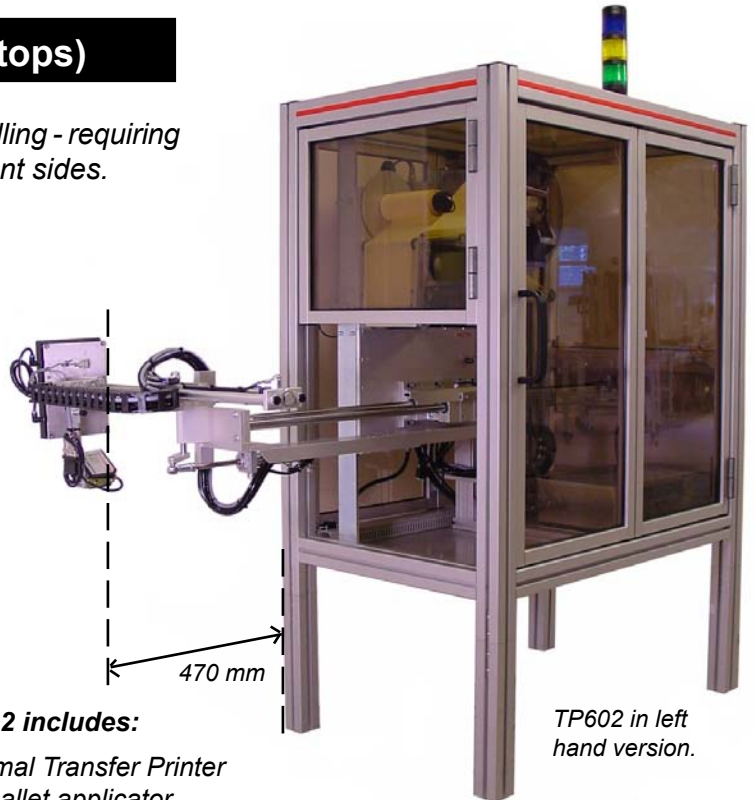


TP602 in left hand version.

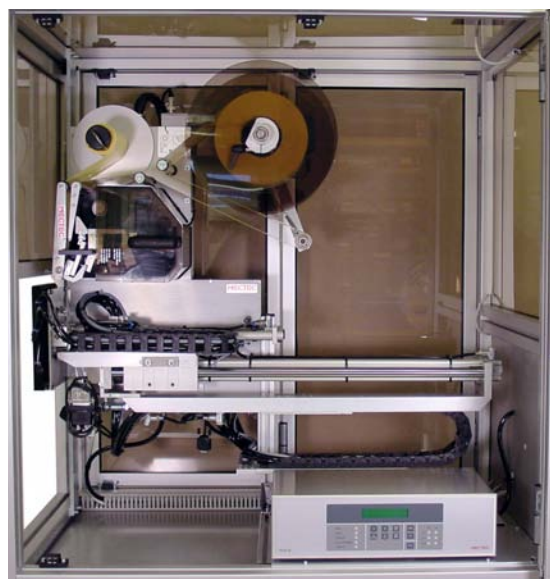

The TP602 includes:

- 6" Thermal Transfer Printer
- 2-side pallet applicator
- PCU III - Control unit
- Cabinet with three doors
- Warning - low level labels
- Warning - low level ribbon
- Flashlight/beacon
- Check scanner
- Air regulator, soft start valve
- Harting Industrial Connectors

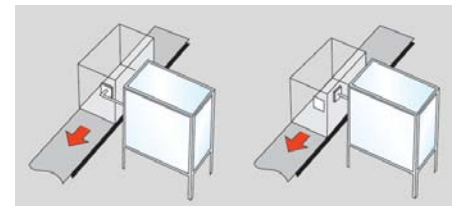

Labelling procedure.

TECHNICAL DATA

Type of applicator:	Tamp/Tamp-Blow. The blow can be switched off
Tamp size:	150 x 210 mm
Print speed:	Up to 275 mm/sec
Resolution:	8 or 12 dots/mm 200/300 DPI
Interface:	2 x RS232, 1 x RS485, 1 x Parallel
Cabinet dimensions:	1050 x 680 mm (l x w) The total height is dependent of label position and conveyor height.
Controller functions:	On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

Printer:	6" Thermal Transfer
Application:	One label is applied on the front (or back) and one on the side of a stationary pallet (2 Stops required)
Label size:	A5 portrait (150x210 mm) preferred
Distance:	470 mm from the cabinet to the applicator pad

Available in both right- and left hand version!

ACCESSORIES

CABINET

- Emergency stop
- Door interlock switches
- Fan / heating / climate control
- Electrical height adjustment
- Pneumatic hatch / Sealed doors
- PC-Module

OTHER

- TG300 - Handheld terminal
- Label Check in the Applicator