



TP601 - PALLET LABELLING (1 stop)

The TP601 is a system for automatic 2-side pallet labelling - requiring only **one** stop of the pallet - when labelled on two adjacent sides. The "1-stop" solution makes the machine fast and easy to integrate with your existing pallet / conveyor system!


The TP601 has the reliable, robust and easy to use design - as seen on all the Mectec family machines. It is proven to give you 24 hours reliable labelling for many years to come - even in the most harsh industrial environments!

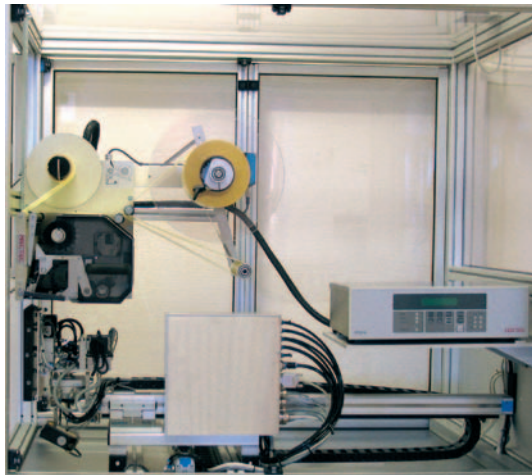

TP601 in left hand version
Pos.1 apply on front or back side of the pallet

The TP601 includes:

- 6" Thermal Transfer Printer
- 2-side pallet applicator
- PCU III - Control unit
- Cabinet with three doors
- Warning - low level labels
- Warning - low level ribbon
- Flashlight/beacon
- Check scanner
- Air regulator, soft start valve
- Harting Industrial Connectors

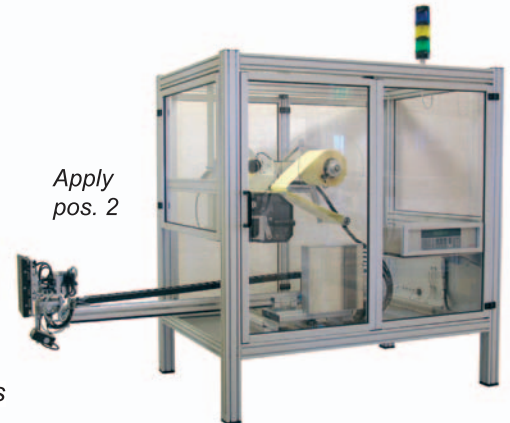

TECHNICAL DATA

- Type of applicator:** Tamp/Tamp-Blow. The blow can be switched off
- Tamp size:** 150 x 210 mm
- Print speed:** Up to 275 mm/sec
- Resolution:** 8 or 12 dots/mm 200/300 DPI
- Interface:** 2 x RS232, 1 x RS485, 1 x Parallel
- Cabinet dimensions:** 1250 x 980 mm (l x w) or 1450 x 980 mm (l x w) depending on model (600 / 800 mm main stroke)
The total height is dependent of label position and conveyor height.
- Controller functions:** On-Line and Stand Alone operation, 2 x 20 characters display, 9 keys, 11 status LEDs. 24 Inputs, 26 Outputs. Real time clock, counters, date offsets and much more...!

FAST FACTS

- Printer:** 6" Thermal Transfer
- Application:** One label is applied on the front (or back) and one on the side of a stationary pallet
- Label size:** A5 portrait (150x210 mm) preferred
- Distance:** 340 or 540 mm from the cabinet to the applicator pad (depending on 600 / 800 mm stroke model)

Available in both right- and left hand version!

ACCESSORIES

- CABINET**
- Emergency stop
 - Door interlock switches
 - Fan / heating / climate control
 - Electrical height adjustment
 - Pneumatic hatch / Sealed doors
 - PC-Module
- OTHER**
- TG300 - Handheld terminal
 - Label Check in the Applicator Pad